



SPECIFICATION

Active substance specification No. 040-01

Date: August 13, 2002

Page: 1 of 2

Isobond P-68

Product No. 040

CAS No. 101-65-5

Specification replaced: -

Prepared by: Dr. Dittrich

Checked by: Dr. Müller


1. Description

68 % wet cake of phenol-blocked diphenylmethan-4,4'-diisocyanate

Chemical name

wetcake of 4,4'-methylene-bis(phenyl carbanilate)

Structural formula

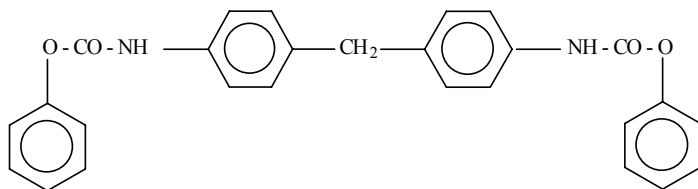

Empirical formula

$C_{27}H_{22}N_2O_4$

Molar mass

438.48 g/mol

Odour

Slight phenol-like

Melting point

180 – 190 °C

Appearance

White, moist powder

2. Manufacture

By reaction of phenol with diphenylmethan-4.4'-diisocyanate.

3. Application

The product is used as an adhesion promoter for polyester tyre cords and reinforcing fabric. It is used either in a pre-dip in combination with water soluble epoxide resin or as an additive to the RFL dip.

4. Storage Stability

Stable for 4 years when stored in a cool, dry place away from any direct sources of heat and light.

5. Technical Demands

<u>Test parameter</u>	<u>Minimum</u>	<u>Maximum</u>	<u>Test method</u>
Appearance	white to yellowish wetcake		
Melting point [°C] *	180	190	Boetius
Free NCO content [%] *	-	0,1	Titration
Heat loss [%]	29	35	Moisture analyzer MA 30 (Sartorius)

* run on dried sample